

ALPHA



VACULOY® WAVESOLDER METAL

- Good wetting, high fluidity
- Reduced product usage
- Low fillets
- Bright joints, easy inspection

DESCRIPTION

VACULOY® is manufactured using high purity raw materials and the alloy is conditioned using Alpha's VACULOY® viscosity and dross lowering treatment. This results in a pure low dross high fluidity solder alloy, which is free of cast in impurities and included oxides.

FEATURES & BENEFITS

VACULOY® treated prior to casting: this removes finely divided suspended oxides that are found in all virgin raw materials, this increases the fluidity and hence soldering defects.

The removal of the finely divided oxide reduces drossing rate, the wave stays cleaner, longer.
Has a proven track record, no need to take chances.

APPLICATION

VACULOY® is the ideal companion product for all wave soldering systems. VACULOY® is ideal for the following types of applications:

- High volume wave soldering processes
- Applications requiring dual wave and chip wave systems



Cookson Electronics ASSEMBLY MATERIALS



Cookson Electronics ASSEMBLY MATERIALS

Boards that are densely populated

A solder pot temperature of 240 - 250° is recommended. For suitable wave solder fluxes, please see our selector guide. Reclaim services including dedicated containers are also available, please consult your local sales office.

AVAILABILITY

VACULOY® is available in 3.5kg feeder bars, 1kg bars and solder chunks for first fill of solder baths. Also available in a range of solid solder wire for autofeed and selective soldering.


HEALTH & SAFETY

Please refer to MSDS for advice on proper handling and safety instructions.

The information contained herein is based on data considered accurate and is offered at no charge. No warranty is expressed or implied regarding the accuracy of this data. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated.

DIMENSIONS OF BARS


ALL DIMENSIONS IN MM

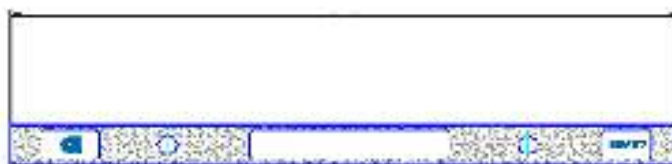

1KG



25.4

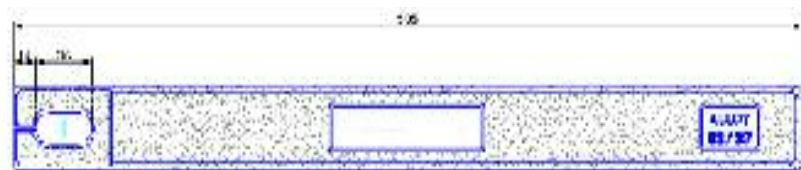

3.5KG

TECHNICAL SPECIFICATION

The information contained herein is based on data considered accurate and is offered at no charge. No warranty is expressed or implied regarding the accuracy of this data. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated.



Cookson Electronics ASSEMBLY MATERIALS

The following indicates the Alloy and impurity limits for VACULOY® in relation to J-STD-006A, ISO9453 and JIS Z3282.

ELEMENT	VACULOY®	ISO 9453 Alloy 1 ¹	J-STD-006A Sn63Pb37B ²	JIS Z3282A H63A ³
Sn	62.5-63.5	62.5-63.5	62.5-63.5	62.5-63.5
Pb	Balance	Balance	Balance	Balance
Sb	0.12 max	0.12 max	0.20 max	0.12 max
Cu	0.05 max	0.05 max	0.08 max	0.05 max
Zn	0.001 max	0.001 max	0.003 max	0.002 max
Fe	0.01 max	0.02 max	0.02 max	0.02 max
As	0.01 max	0.03 max	0.03 max	0.03 max
Ni	0.01 max	Not specified	0.01 max	Not specified
Bi	0.10 max	0.10 max	0.10 max	0.10 max
Cd	0.001 max	0.002 max	0.002 max	0.002 max
Ag	0.10 max	Not specified	0.10 max	Not specified
Al	0.001 max	0.001 max	0.005 max	0.002 max
In	0.05 max	Not specified	0.10 max	Not specified

All figures are %

1. ISO 9453: 1990

Soft Soldering Alloys - chemical composition and form. ISO - International Standards Organisation, a network of national standards institutes working in partnership.

2. J-STD-006A: May 2001

Requirements for Electronic Grade Solder alloys and non-fluxed solders. Joint Industry Standard between IPC and Electronic Industries Alliance (US Based). IPC formed in 1957 as an Institute of Printed Circuits, J-STD-006A supercedes IPC-SF-818.

3. JIS Z3282:1999

Soft solders chemical composition and forms. JIS - Japanese Industrial Standard.

European Headquarters:

Cookson Electronics Assembly Materials
Forsyth Road, Sheerwater
Woking, Surrey
GU21 5RZ, United Kingdom
Tel: +44 (0) 1483 793100
Fax: +44 (0) 1483 793101

Worldwide Headquarters

Cookson Electronics Assembly Materials
600 Route 440
Jersey City, New Jersey 07304
USA
Tel: +1 (201) 434 6778
Fax: +1 (201) 434 7508

Regional Offices

Belgium: Tel: +32 (0) 14 44 50 00
France: Tel: +33 (0) 2 41 49 00 11
Germany: Tel: +49 (0) 21738490 300
Ireland: Tel: +353 (0) 1 842 1172
Italy: Tel: +39 (0) 2 38 33 11
Hungary: Tel: +36 (0) 24 460 720
Netherlands: Tel: +31 (0) 35 695 5411

www.alphametals.com

The information contained herein is based on data considered accurate and is offered at no charge. No warranty is expressed or implied regarding the accuracy of this data. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated.